


CONCRETE SCREED PAVER



Optional Accessories

- Vibrating needles
- Fabricated rails

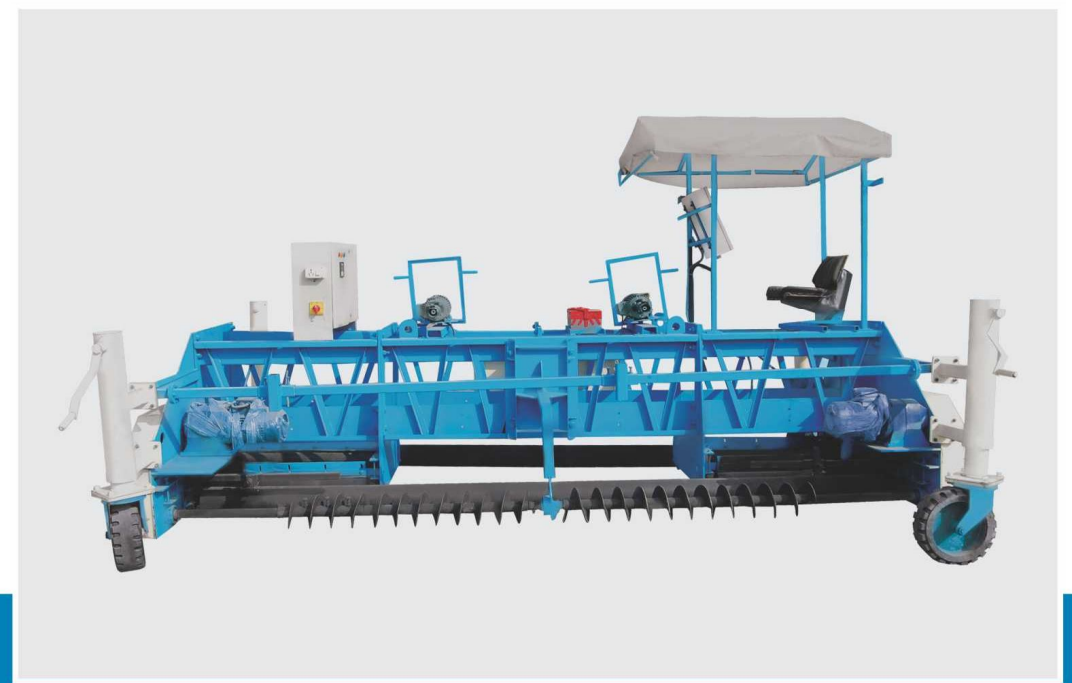

Technical Specification

Model		
Length	Clear working width available from 2 mtr – 6 mtr	
Cylindrical finishing rollers	Unique design as we provide two separate cylindrical finishing rollers one at the front side and another at the back side so better finishing is achieved.	
Augur arrangement	Full length augur is provided at the front side for spreading extra concrete equally on the both the ends of the slab to achieve even surface.	
Drive rollers	Total four drive rollers are given where two rollers at each side is given with separate drive for both the ends with provision of forward and reverse rotation so one can move the paver forward or reverse as per need.	
Prime movers	Spreader augur	3 HP electrical geared motors
	Cylindrical finishing rollers	5 HP x 2 nos ele. Geared motors
	Drive rollers	3 HP x 2 nos ele. Geared motors
	Total connected load (h.p)	19 HP
	Suggested d.g. set	32 kva
Operator sitting arrangement	Adjustable seat with canopy provided at the top of the paver for the operator	
Control panel	Mounted on the top of the paver with internal cabling and with wired remote control to operate the paver.	
Mobility	Four mechanical type swivel jacks with solid tyre provided for height adjustment and for moving the paver at the each end of structure.	